


PCB fuse holder H7810, miniOTO fuse

- 2x1 (2-pin) CuSn tinned fuse receptacles, with integrated contact springs
- Standard PET GF33 UL94-V0 body material
- Stackable, to create multi-position holder (pitch 6.0mm)
- Printed circuit board matching hole 1.5mm, spacing 8.0mm

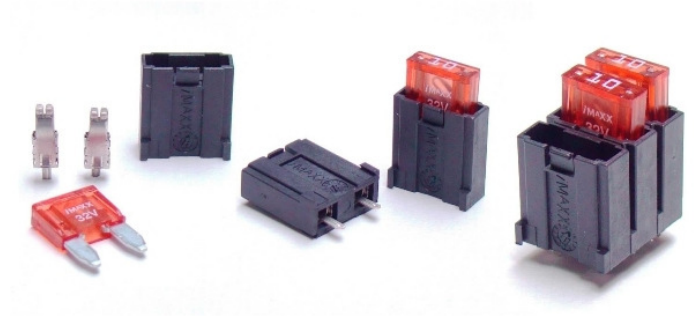

iMaXX ref.	Description
H7810	FH miniOTO, PET GF33, circuit board, 1p

H7810

